

CAS381/CAS381WP

Eaton's Cooper wall sounders



Two versions of the intelligent addressable wall sander are available in this range the internal (CAS381) and the weatherproof (CAS381WP).

Both the (CAS381) and the (CAS381WP) are compatible with the Cooper range of intelligent addressable fire systems.

The high efficiency design of these intelligent addressable wall sounders offer excellent sound output levels despite the low current consumption.

CAS381

This device is designed for wall mounting, has a choice of different tones and volume levels, a built in short circuit isolator and is soft addressed for ease of installation.

CAS381WP

This device is IP66 rated and therefore suitable for external and wash down areas, it is designed for wall mounting, has a choice of different tones and volume levels, a built in short circuit isolator and is soft addressed for ease of installation.

Features

- Loop powered
- Soft addressed
- Integral short circuit Isolator
- High efficiency design
- Simple clip fixing assembly
- Two models available
 - Internal
 - Weatherproof

Benefits

- Quick and simple to install
- Low current consumption
- Selectable tone controlled by the panel
- Adjustable volume controlled by the panel
- First fix back box
- IP65 version available
- Easy to maintain/service

Technical Specification

Code	CAS381	CAS381WP
Description	Internal Wall Sounder	Weatherproof Wall Sounder
Standards	EN54 Pt3	EN54 Pt3
Specification		
Operating Voltage	17V dc to 32V dc	17V dc to 32V dc
Standby Current	< 320µA	< 320µA
Tones (set by panel)	Continuous: 984Hz Pulsed: 984Hz / 0Hz pulse 1Hz Two tone: 644 / 984Hz at 1Hz cycle Slow whoop: 500-1200Hz in 3.5 seconds/0.5secs gap	Continuous: 984Hz Pulsed: 984Hz / 0Hz pulse 1Hz Two tone: 644 / 984Hz at 1Hz cycle Slow whoop: 500-1200Hz in 3.5 seconds/0.5secs gap
Sound Output at +/-3dB (set by panel)	Low volume : 87dB at < 2mA Medium volume : 93dB at < 3mA High volume: 100dB at < 6mA	Low volume : 87dB at < 2mA Medium volume : 93dB at < 3mA High volume: 100dB at < 6mA
Environmental		
Operating Temperature	-10°C to +55°C	-10°C to +55°C
Humidity (Non Condensing)	0 to 95% RH	0 to 95% RH
Physical		
Construction	PC/ABS	PC/ABS
Colour	Red	Red
Dimensions (H x W x D)	105mm x 105mm x 95mm	108mm x 108mm x 103mm
Weight	0.25kg	0.57kg
Ingress Protection	IP42	IP66
Cable Entry	Rear/side	Rear/side
Compatibility		
Suitable for use with	Cooper Intelligent Addressable Fire Systems	Cooper Intelligent Addressable Fire Systems

Installation


CAS381

1. Installation is simple using first fix base.
2. First fix base is fixed to mounting surface using 2 fixing holes.
3. Cable entry can be rear or side.
4. Connections are to connector block on main sounder body.
5. Main body is then clipped into position on mounting base, body locks into position when pressed home.

CAS381WP

1. Installation is simple using first fix base.
2. First fix base is fixed to mounting surface using 2 fixing holes.
3. Cable entry can be rear or side.
4. Connections are to connector block on main sounder body.
5. Main body is then fastened onto base, using 4 allen head screws (supplied).


Standard Connections

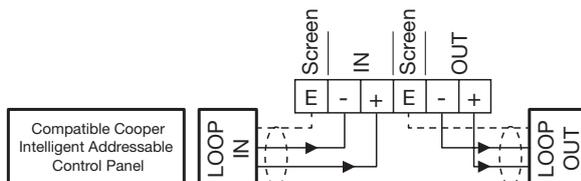

WARNING:
Do NOT use high voltage testers if ANY equipment is connected to the system.

Screen (Earth) must be continuous along entire length of loop.

Dimensions

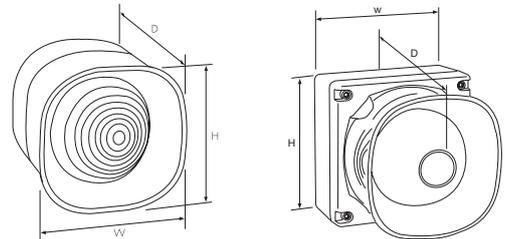

Description	H (mm)	W (mm)	D (mm)
Internal	105	105	95
Weatherproof	108	108	103

System Functionality

CAS381/CAS381WP

1. Volume is set by fire control panel, no need to access sounder to alter setting.
2. Tone is set by fire control panel, no need to access sounder to alter setting.

Catalogue numbers

Description	Code
Internal Wall Sounder	CAS381
Weatherproof Wall Sounder	CAS381WP