

# CF2000GCPD range

## Intelligent addressable control panel



The Eaton CF2000GCPD is an entry level intelligent addressable control panel which can be configured for either 1 or 2 loop operation, and is certified to EN54 parts 2 & 4.

The panel has a graphic display, providing a simple menu driven end user interface. With the CF2000GCPD's ability to support Eaton cause and effect programming and a range of user controllable functions it makes the panel suitable for a varied range of projects from small warehouses to small/medium office developments as well as many small industrial applications.

As with all Eaton intelligent addressable panels, the CF2000GCPD uses "spur tolerant" soft addressing to minimise installation time and remove the potential for errors often associated with many forms of manual addressing.


### Features and benefits

- Configurable as a 1 or 2 loop panel
- Up to 200 addresses per loop (up to 60 sounders/beacons and up to 20 I/Os, subject to loop loading calculations)
- Soft addressing
- Menu-driven graphic screen
- Multi-language selection capability
- Integral battery and power supply
- 2x7Ah batteries included
- Easy to operate end user controls
- Full system integrity with Eaton developed protocol
- Core range of compatible devices
- 4 sounder circuits
- Monitored for open and short circuit (max 3.0A combined)

### Technical specification

Code	CF2000GCPD
Description	2 loop control panel
Standards	EN54 Pt2 1997, A1: 2006 EN54-4 1997, A1: 2002 & A2: 2006
<b>Specification</b>	
Number of loops	2
Addresses per loop	200
Panel sounder circuits	4 outputs, 1A total (programmed in pairs - outputs 1 & 2, 3 & 4)
Class change facility	Operated by external, normally open, volt free contacts
Auxiliary relay	One set of change over contacts, operated in the event of fire activation
<b>Auxiliary fire</b>	
Routing equipment output	Monitored 24V dc, 30mA (max) auxiliary fire
Protection equipment output	Monitored 24V dc, 30mA (max) auxiliary fault
Routing equipment output	Monitored 12V dc, 30mA (max) mains input voltage 230V ac +10% / -15%
Operating voltage	24V dc
Batteries	2 x 12V 7Ah
Standby duration	24 hours (dependant on loop loading)
<b>Environmental</b>	
Operating temperature	-5°C to +40°C humidity (non condensing) 0 to 75% RH
<b>Physical</b>	
Construction	Back box - mild steel, door - PC/ABS
Colour	Graphite
Dimensions (H x W x D)	400mm x 320mm x 170mm weight 15kg
Ingress protection	IP30
Cable entry	Top: 20 entry cable knockouts (20mm) Rear: 7 entry cable knockouts (20mm)

### Dimensions

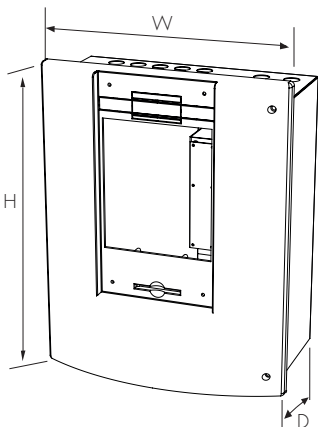

H (mm)	W (mm)	D (mm)
400	320	170

### Installation

The CF2000GCPD has been designed with ease of installation as a major objective.

The panel back box can be surface mounted with cable entry points to both the top and rear. The mother board and integrated power supply are mounted on a sub chassis which is easily removed to aid panel fitting.

Back box mounting is further assisted with the provision of a drill template allowing the mounting screw holes to be pre-drilled and the top two mounting screws fitted prior to final positioning of the back box.

Ample room is provided within the back box for the termination of external cables and bonding of cable screen wires.


### System configuration

The CF2000GCPD can be configured to operate as a 1 or 2 loop panel. Using Eaton system protocol the panel "auto learns" the equipment mounted on the loop(s) and "soft addresses" each item, ensuring a simple setup procedure and reducing the time required for system setup.

All loop mounted equipment has integral short circuit isolators, ensuring loop integrity is maintained should a short circuit fault occur on the loop.

A comprehensive range of interface units are available and compatible with the CF2000GCPD.

### Standard panel connections

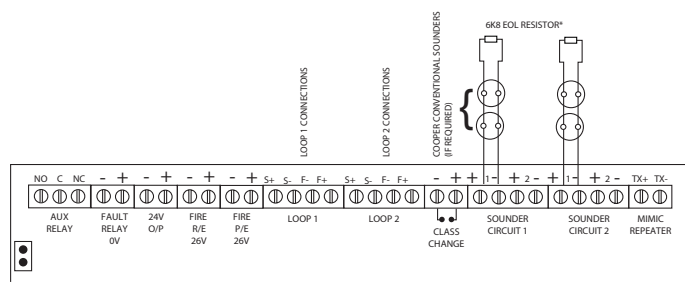

\* required to be fitted to terminal if circuits not used

### Catalogue numbers

Code	Description
CF2000GCPD	Intelligent addressable 2 loop control panel
MFALOG	Fire alarm system log book

**Eaton**  
Electrical Sector EMEA  
Route de la Longeraie 7  
1110 Morges, Switzerland

**Eaton**  
**Fire Systems Business**  
Cooper Lighting and Safety Ltd  
Wheatley Hall Road  
Doncaster  
South Yorkshire  
DN2 4NB  
United Kingdom  
**Tel:** +44 (0)1302 303 999  
**Fax:** +44 (0)1302 303 333  
**Email:** [techsupport@cooperfire.com](mailto:techsupport@cooperfire.com)  
**Web:** [www.cooperfire.com](http://www.cooperfire.com)

© 2014 Eaton  
All Rights Reserved  
Pub Reference: FDS001  
October 2014

Changes to the products, to the information contained in this document, and to prices are reserved; so are errors and omissions. Only order confirmations and technical documentation by Eaton is binding. Photos and pictures also do not warrant a specific layout or functionality. Their use in whatever form is subject to prior approval by Eaton. The same applies to Trademarks. The Terms and Conditions of Eaton apply, as referenced on Eaton Internet pages and Eaton order confirmations.

Eaton is a registered trademark. All other trademarks are property of their respective owners.